



3RUS2 3RUS4

HIGH VOLTAGE, HIGH CURRENT
ULTRA-FAST RECOVERY
SILICON RECTIFIER DIODES



PRV	1200	1500	1800
TYPE	3RUS2120 3RUS4120	3RUS2150 3RUS4150	3RUS2180 3RUS4180

ELECTRICAL CHARACTERISTICS(at T_A=25 °C Unless Otherwise Specified)

Type	3RUS2	3RUS4
Avg. Rectified Forward Current @ 50° Amb., I _o (Fig.1)	1.25 Amp	1.50 Amp
Avg. Output Current @ 80°C lead temperature Lead Temp-measured 3/8" from body of diode	2.0 Amp	2.5 Amp
Max. Reverse Current @ PRV and 25°C, I _R	5 μA	5 μA
Max. Reverse Current @ PRV and 100°C, I _R	50 μA Max	100 μA
Max. Forward Voltage Drop @ 25 °C, 2.0Amps, V _F	4V.	4V.
Max. Peak Surge Current, I _{FSM} (8.3 ms)(Fig.2)	100A	300A
Operating Temp Range	-65 °C to +150 °C	
Storage Temp Range	-65 °C to +150 °C	
Reverse Recovery Time, t _{rr}	50 nanosec	

NOTE:

Maximum lead and terminal temperature for soldering, 3/8 inch from case, 5 seconds at 250 °C

EDI reserves the right to change these specifications at any time without notice.

3RUS2 3RUS4

FIG.1

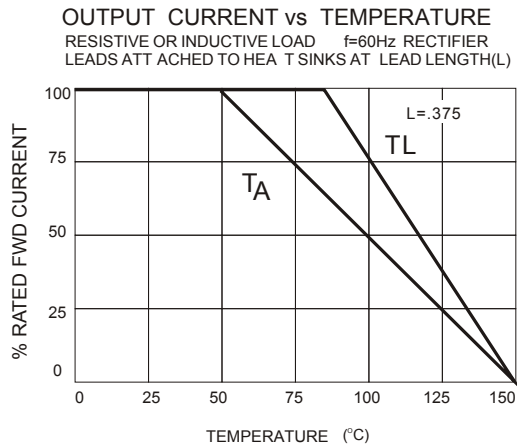


FIG.2


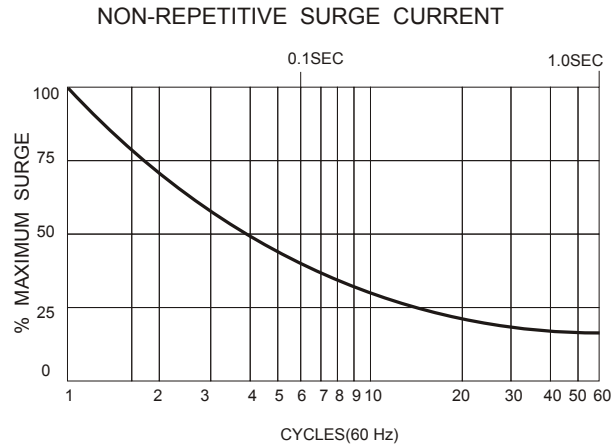




FIG.3
PACKAGE STYLE

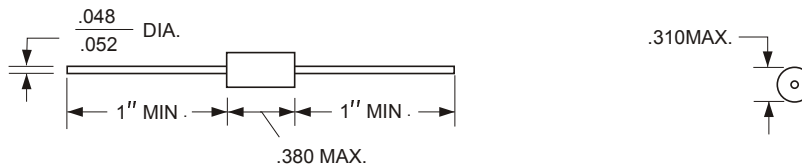

TEST CIRCUIT

FIG.4

TYPICAL REVERSE RECOVERY WAVEFORM

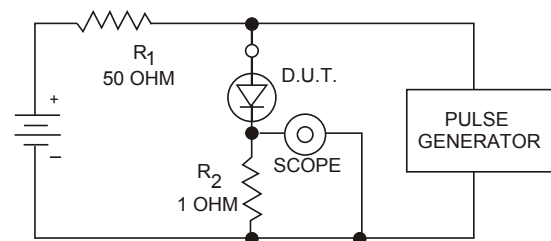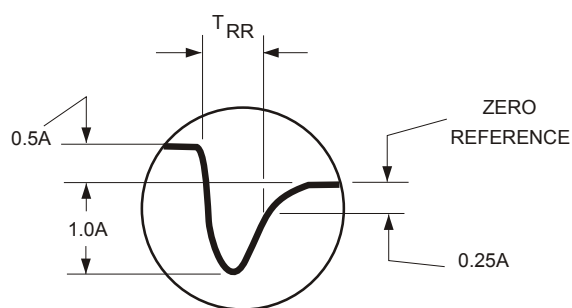

R₁, R₂ NON-INDUCTIVE RESISTORS
PULSE GENERATOR-HEWLETT PACKARD 214A OR EQUIV.
IKC REP.RATE, 10 μ SEC. PULSE WIDTH
ADJUST PULSE AMPLITUDE FOR PEAK I_R

ELECTRONIC DEVICES, INC. DESIGNERS AND MANUFACTURERS OF SOLID STATE DEVICES SINCE 1951.

21 GRAY OAKS AVENUE * YONKERS, NEW YORK 10710 914-965-4400 * FAX 914-965-5531 * 1-800-678-0828
e-mail:sales@eddiodes.com * website: <http://www.edidiodes.com>