


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PUI AUDIO, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PUI AUDIO, INC. IS PROHIBITED.
© 2010, PUI AUDIO Inc.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.01	W
MAX INPUT POWER	0.02	W
IMPEDANCE	600±15%	OHM
OUTPUT SPL @ 1KHz, 179mV (IEC 318 COUPLER)	120±3	dBA
DISTORTION (MAX.)	5%	-
FREQUENCY RANGE	100 ~ 10,000	Hz
HOUSING MATERIAL	PLASTIC	-
CONE MATERIAL	MYLAR	-
MAGNET MATERIAL	NdFeB	-
OPERATING TEMPERATURE	-30 ~ +70	°C
WEIGHT	7.5	grams


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/12/19	
A	REVISED FREQUENCY RANGE	1/10/2020	M.V

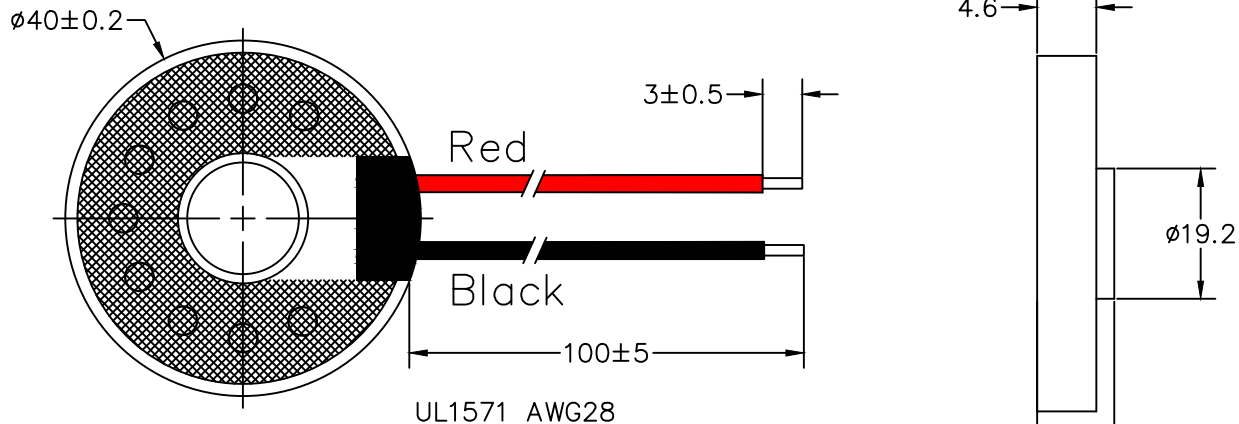

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

FILE NAME
AR040600MR-LW100

UNLESS OTHERWISE SPECIFIED: ALL PURCHASES ARE SUBJECT TO THE PUI AUDIO TERMS AND CONDITIONS SALE FOUND AT http://www.puiaudio.com/pdf/terms_conditions.pdf (paper copy available upon request). DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.		 pui audio inc 3541 Stop Eight Rd. Dayton, OH 45414	
APPROVALS	DATE		
DRAWN	M.L.	11/19	RECEIVER DRAWING NO. AR040600MR-LW100-R
CHECKED	M.L.	11/19	
APPROVED	B.R.	11/19	
SCALE: N.T.S.		SIZE A	SHEET 1 OF 1