


GAX Series
Right Angle Ganged Jack

Features   

- Available in 6 and 8 Position Housings
- Right Angle Version
- Ribbed Pin Guides
- Metal Locking Brackets
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

Thermoplastic, UL 94V-0 Rated, Gray Color

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms Min.

Dielectric Withstanding Voltage

1000V AC RMS for 1 Minute

Contact Resistance

20 milliohms Max.

Current Rating

1.5A

Voltage Rating

125V DC

MODULAR JACKS AND PLUGS

GAX Series

Documentation & Ordering Information


Kycon Part #

Part Number Builder

— Series	— Number of Ports	— Number of Positions	— Plating Option
Series			
GAX - Right Angle P.C.B. Mount			
Number of Ports			
2 - 2 Port (Available with 6 and 8 Positions)			
3 - 3 Port (Available with 6 and 8 Positions)			
4 - 4 Port (Available with 6 and 8 Positions)			
5 - 5 Port (Available only with 6 Positions)			
6 - 6 Port (Available only with 6 Positions)			
7 - 7 Port (Available only with 6 Positions)			
8 - 8 Port (Available only with 6 Positions)			
Number of Positions/Contacts			
62 - 6 Positions/ 2 Contacts			
64 - 6 Positions/ 4 Contacts			
66 - 6 Positions/ 6 Contacts			
88 - 8 Positions/ 8 Contacts			
Plating Option			
Blank - Gold Flash			
50 - 50µ" Gold Plating			
Contact Kycon for more options.			


*See next page for dimensions

GAX-x-6x Series
Dimensions in mm

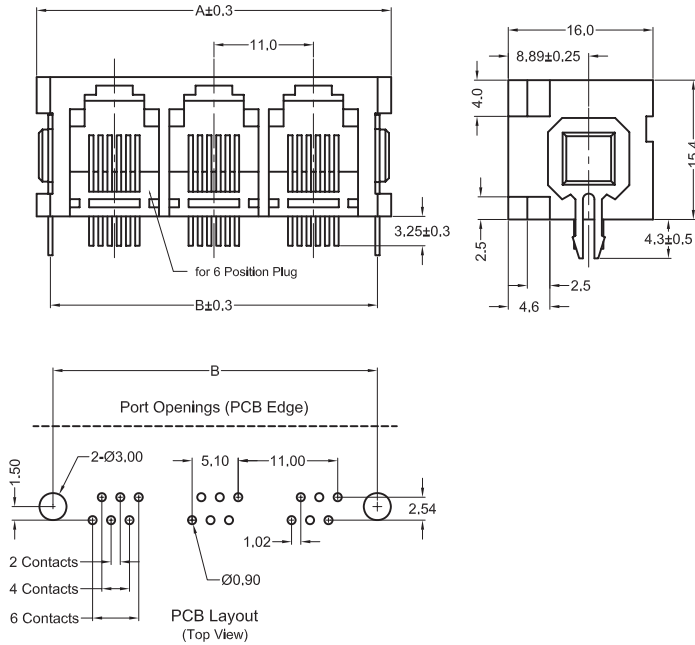

Dimensions [mm]	Number of Ports						
	2	3	4	5	6	7	8
A	28.0	39.0	50.0	61.0	72.0	83.0	94.0
B	24.8	35.8	46.8	57.8	68.8	79.8	90.8

GAX-x-8x Series
Dimensions in mm

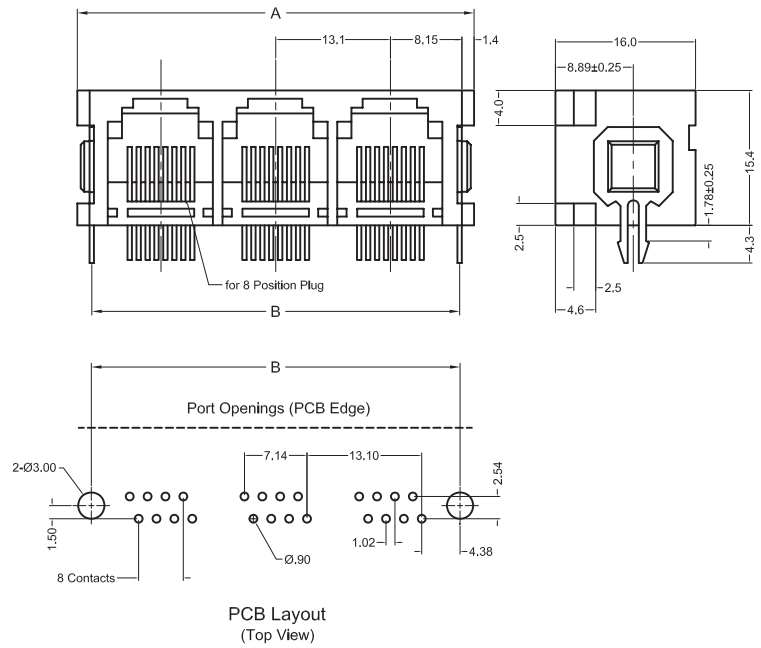

Dimensions [mm]	Number of Ports		
	2	3	4
A	32.3	45.3	58.5
B	28.9	42.0	55.1