


D-SUBMINIATURE CONNECTORS: K66X Series Right Angle PCB Mount

K66X Series Dimensions Dimensions in mm

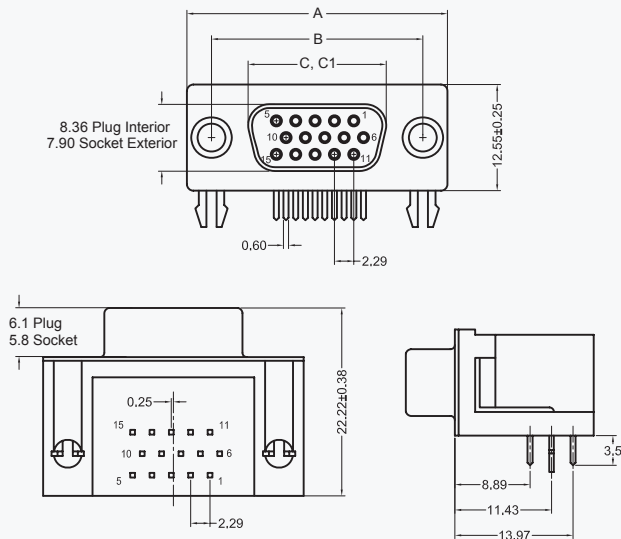

Shell Size	Dimensions (mm)					
	A	B	C	C1	D	E
15 (E)	1.213 ±.015 ±0.38	.984 ±.005 ±0.13	.643 ±.010 ±.0.25	.666 ±.010 ±0.25	.090 ±.005 ±0.13	.010 ±.005 ±0.13
26 (A)	1.541 ±.015 ±0.38	1.312 ±.005 ±0.13	.971 ±.010 ±.0.25	.994 ±.010 ±0.25	.090 ±.005 ±0.13	.020 ±.005 ±0.13
44 (B)	2.088 ±.015 ±0.38	1.852 ±.005 ±0.13	1.511 ±.010 ±.0.25	1.534 ±.010 ±0.25	.090 ±.005 ±0.13	.020 ±.005 ±0.13
62 (C)	2.729 ±.015 ±0.38	2.500 ±.005 ±0.13	2.159 ±.010 ±.0.25	2.182 ±.010 ±0.25	.095 ±.005 ±0.13	.023 ±.005 ±0.13

C = Exterior of Female Shell (S)

C1 = Interior of Male Shell (P)

Electrical Characteristics

Rated Current: 1.5A

Rated Voltage: 29Vac

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Shell Size Contact	Contact Type	Mounting Option	Plating Option

Series

K66X - High Density D-Subminiature Connector,
Right Angle PCB Termination, 0.350" Footprint

Shell Size-Contact Option

- E - 15 Contacts
- A - 26 Contacts
- B - 44 Contacts
- C - 62 Contacts

Contact Type

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

Mounting Option

- N - With Boardlocks and #4-40 UNC Threaded Inserts
- NJ - With Boardlocks and #4-40 Jackscrews Installed

Plating Option

- Blank - Gold Flash
- 30 - 30µ" Gold

Contact Kycon for VESA and Other Options