


Mechanical Specifications

D	30.0±2.5 mm
T	8.0±1.0 mm
Lead Diameter	1.0±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0±1.0mm
B	9.30±0.85mm
C	3.82±1.0mm

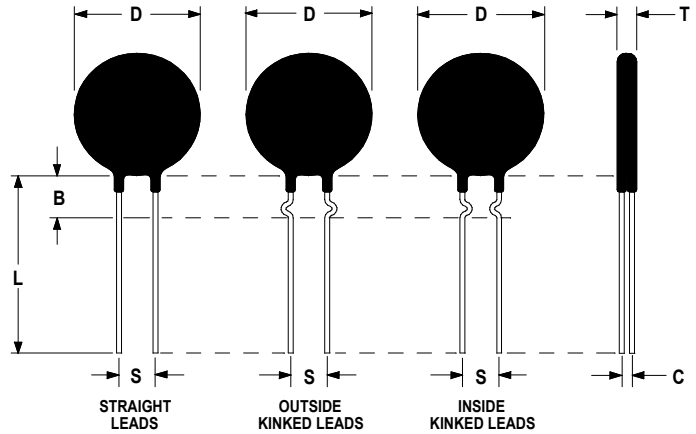

Electrical Specifications

Resistance @ 25°c	10.0 Ω ± 20%
Max Steady State Current Up to 65°c	15.0 A
Max recommended Capacitance @ 440VAC	1250µF
Max recommended energy rating (Joules)	250.0 J
Actual failure point of instantaneous energy (Joules)	500.0J
Resistance @ 100% of Max Current	0.058 Ω
Resistance @ 50% of Max Current	0.220Ω
Body Temperature @ 100% Current rating	224°C
Dissipation Constant	63.7mW/°C
Thermal Time Constant	194seconds
Material Type	“H”