


Mechanical Specifications

D	30.0 ±2.5 mm
T	7.0 ±1.0 mm
Lead Diameter	1.0±0.1mm
S	7.8 ±2.0mm
L	38.0 ±9.0 mm
Straight Leads Coating run down	5.0mm Max
B	9.2 ±0.85mm
C	5.70 ±1.0mm

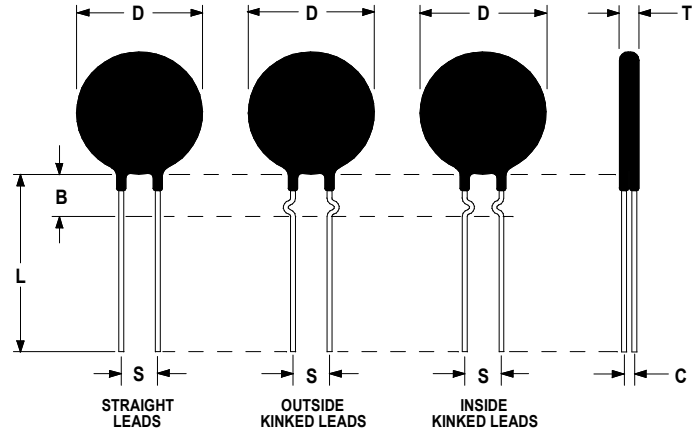

Electrical Specifications

Resistance @ 25°C	5.0 Ω ± 20%
Max Steady State Current Up to 65°C	20.0 A
Max recommended energy rating (Joules)	325.0 J
Actual failure point of instantaneous energy (Joules)	650.0J
Resistance @ 100% of Max Current	0.045 Ω
Resistance @ 50% of Max Current	0.100 Ω
Body Temperature @ 100% Current rating	204°C
Dissipation Constant	55.4mW/°C
Thermal Time Constant	194seconds
Material Type	"G"

Rev.	Date:	Change:
1	7/26/15	Update dimensions

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com