


Mechanical Specifications

D	12.0±0.5 mm
T	5.1±0.6 mm
Lead Diameter	0.8±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0mm Max
B	6.35±0.60mm
C	3.42±0.5mm

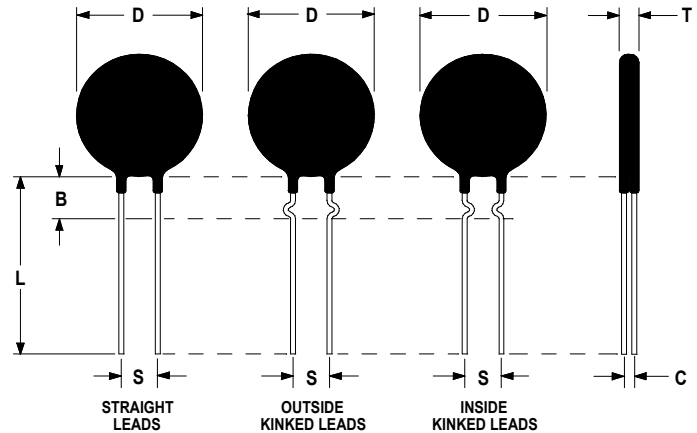

Electrical Specifications

Resistance @ 25°C	10.0 Ω ± 20%
Max Steady State Current Up to 65°C	6.0 A
Max recommended energy rating (Joules)	40.0 J
Actual failure point of instantaneous energy (Joules)	80.0J
Resistance @ 100% of Max Current	0.120 Ω
Resistance @ 50% of Max Current	0.242 Ω
Body Temperature @ 100% Current rating	172°C
Dissipation Constant	12.7 mW/°C
Thermal Time Constant	47seconds
Material Type	"C"

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com