


Mechanical Specifications

D	12.0±0.5 mm
T	5.1±0.2 mm
Lead Diameter	0.8±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0±1.0mm
B	6.35±0.60mm
C	3.42±0.5mm

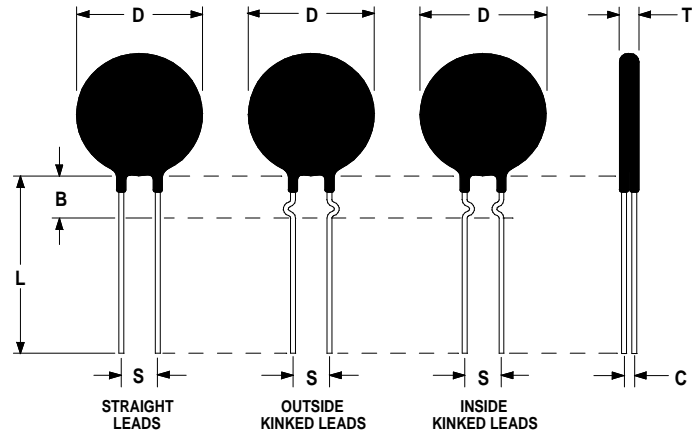

Electrical Specifications

Resistance @ 25°c	20.0 Ω ± 20%
Max Steady State Current Up to 65°c	2.0 A
Maximum recommended capacitance @ 120 VAC / 240 VAC	2000µF/ 500µF
Max recommended energy rating (Joules)	30.0 J
Actual failure point of instantaneous energy (Joules)	60.0J
Resistance @ 100% of Max Current	0.446 Ω
Resistance @ 50% of Max Current	0.843 Ω
Body Temperature @ 100% Current rating	132°C
Dissipation Constant	12.7 mW/°C
Thermal Time Constant	40seconds
Material Type	“H”