


Mechanical Specifications:

D	15.0± 1.0 mm
T	6.0 mm Max
Lead Diameter	1.0 ±0.2mm
S (inside kink and Straight lead)	7.8 ±1.0mm
S (Outside kink)	9.5 ± 0.8 mm
L	38.0 mm Nom
B	5.0 mm Max
C	3.7 ± 1.0mm

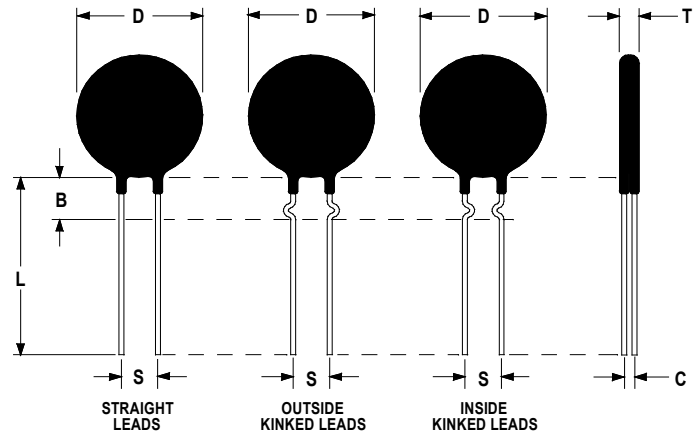

Electrical Specifications:

Resistance @ 25°C	5.0 Ω ± 20%
Max Steady State Current Up to 65°C	9.0 A
Max Recommended Voltage	265 VAC
Max Recommended Capacitance @120 VAC /265VAC	3400μF/ 750μF
Max recommended energy rating (Joules)	50.0 J
Actual failure point of instantaneous energy (Joules)	75.0J
Resistance @ 100% of Max Current	0.052 Ω
Resistance @ 50% of Max Current	0.134 Ω
Body Temperature @ 100% Current rating	206°C Ref.
Dissipation Constant	17 mW/°C
Thermal Time Constant	58 seconds
Material Type	“C”

Revision date: 2/28/19