


Mechanical Specifications

D	20.0±1.0 mm
T	7.0 mm Max
Lead Diameter	1.0±0.1mm
S	7.8 ±2.0mm
L	38.0±9.0 mm
Straight Leads Coating run down	5.0±1.0mm
B	11.5±3.50mm
C	3.82±1.0mm

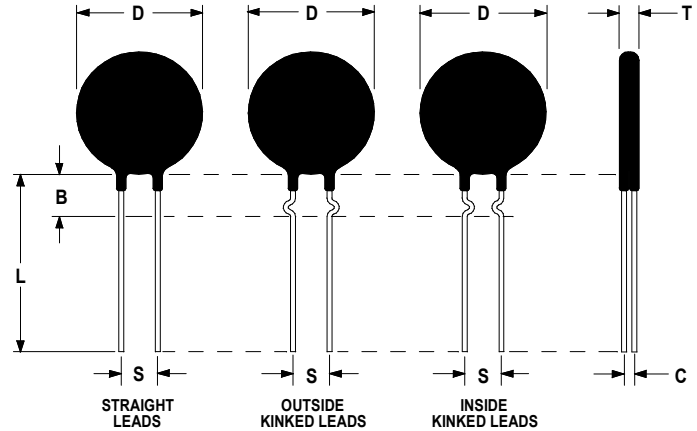

Electrical Specifications

Resistance @ 25°C	0.5Ω ± 25%
Max Steady State Current Up to 65°C	16.0 A
Max recommended energy rating (Joules)	160.0 J
Actual failure point of instantaneous energy (Joules)	250.0J
Resistance @ 100% of Max Current	0.022 Ω
Resistance @ 50% of Max Current	0.072Ω
Body Temperature @ 100% Current rating	192°C
Dissipation Constant	32.4mW/°C
Thermal Time Constant	94seconds

**Ametherm, Inc**  
961 Fairview Dr.  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 702 884-0670  
[www.Ametherm.com](http://www.Ametherm.com)