


Mechanical Specifications

D	22.0 mm Max
T	6.0 mm Max
Lead Diameter	1.0±0.1mm
S	7.8 ±1.0mm
L	38.0±9.0 mm
Coating run down	5.0 mm Max
B	9.35±0.85mm
C	3.82±1.0mm

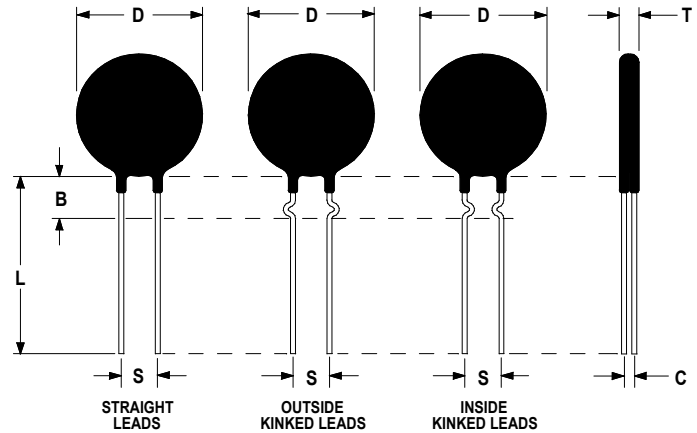

Electrical Specifications

Resistance @ 25°C	2.0Ω ± 20%
Max Steady State Current Up to 65°C	18.0 A
Max recommended energy rating (Joules)	90.0 J
Actual failure point of instantaneous energy (Joules)	200.0J
Resistance @ 100% of Max Current	0.028 Ω
Resistance @ 50% of Max Current	0.074 Ω
Body Temperature @ 100% Current rating	214°C
Dissipation Constant	32.4mW/°C
Thermal Time Constant	94seconds
Material Type	"C"

Ametherm, Inc
961 Fairview Dr.
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775 884-0670
www.Ametherm.com