


CC1A-T1A

AT-Cut Crystal 8 MHz – 30 MHz



DIMENSIONS

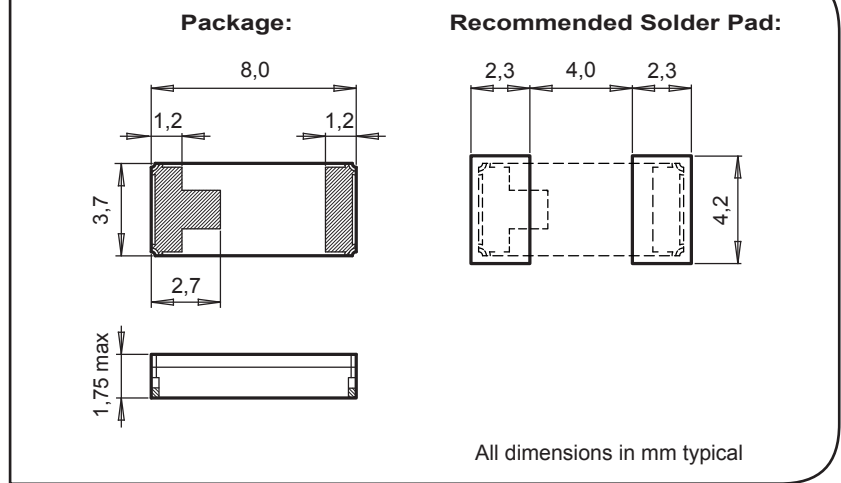

APPLICATIONS

Telemetry
Optical Network
Airborne Equipment
Radio Communications
Health Care and Medical

DESCRIPTION

The CC1A-T1A is a high frequency SMT Quartz Crystal Unit that incorporates an AT-cut Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed ceramic package with ceramic lid.

FEATURES

Outstanding hermetic sealing with gold-tin preform.
High stability and low aging guaranteed by hermetic sealing.
Available for extended operating temperature range.
Operates in fundamental mode.
High shock and vibration resistant.
100% Pb-free, RoHS-compliant.

ELECTRICAL CHARACTERISTICS AT 25°C

Frequency Range	F_L	8 – 30	MHz
Load capacitance ¹⁾	C_L	20.0	pF
Frequency tolerance at +25°C ²⁾	$\Delta F/F$	±50	ppm
Frequency vs. temperature ³⁾ TA: -40 to +85°C TB: -40 to +125°C TC: -55 to +125°C	$\Delta F/F_0$	±50 ±80 ±100	ppm
Drive level typ./max.	P	100 / 500	µW
Insulation resistance min.	R_i	500	MΩ
Aging first year max.	$\Delta F/F$	±3	ppm

1) Other load capacitances on request; e.g. C_L : 9.0 pF.

2) Tighter frequency tolerances on request; e.g. ±20 ppm.

3) Tighter thermal stability on request; e.g. ±10 ppm from 0°C to +55°C.

Frequency	R_s typ./max.	C_1 typ./max.	C_0 typ.
8.000 MHz to 9.999 MHz	60 Ω / 100 Ω	4 fF / 7 fF	2.0 pF
10.000 MHz to 11.999 MHz	50 Ω / 85 Ω	5 fF / 8 fF	2.2 pF
12.000 MHz to 15.999 MHz	40 Ω / 75 Ω	6 fF / 10 fF	2.5 pF
16.000 MHz to 19.999 MHz	35 Ω / 60 Ω	8 fF / 11 fF	2.8 pF
20.000 MHz to 23.999 MHz	30 Ω / 50 Ω	9 fF / 13 fF	3.2 pF
24.000 MHz to 30.000 MHz	30 Ω / 40 Ω	11 fF / 15 fF	4.0 pF

STANDARD FREQUENCIES

Frequencies				
8.0000 MHz	10.0000 MHz	10.1506 MHz	11.0592 MHz	12.0000 MHz
12.2880 MHz	13.5600 MHz	14.3181 MHz	14.7456 MHz	16.0000 MHz
16.3840 MHz	18.4320 MHz	20.0000 MHz	24.0000 MHz	
Other frequencies on request				

ENVIRONMENTAL CHARACTERISTICS

	Conditions
Storage temp. range	-55 to +125°C
TA Operating temperature range	-40 to +85°C
TB Extended operating temp. range	-40 to +125°C
TC Extended operating temp. range	-55 to +125°C
Shock resistance	5000 g, 0.3 ms, ½ sine
Vibration resistance	20 g / 10–2000 Hz

TERMINATIONS AND PROCESSING

Type	Termination	Processing
CC1A-T1A	Au flashed pads	IPC/JEDEC J-STD-020C 260°C / 20 - 40 s
CC1A-T3A	Sn/Ag/Cu solder dipped pads	

ORDERING INFORMATION

C C 1 A - T 1 A 24.000 MHz 20.0 pF ±50 ppm TA QI	
Ceramic package	Frequency F_L
Ceramic lid	Load capacitance C_L 20.0 pF Other C_L on request
Package size 1 = 8.0 x 3.7 x 1.75 mm	Frequency tolerance ±50 ppm Tighter freq. tolerances on request
AT-cut	Temperature range TA = -40 to +85°C (Standard) TB = -40 to +125°C TC = -55 to +125°C
SMT package	Qualification QI = Industrial Grade (Standard) QS = Custom Specification
Pads 1 = Au flashed pads 3 = Sn/Ag/Cu solder dipped pads	
Pads on both ends	

A unique part number will be generated for each product specification, i.e:	
20xxxx-ML01	1'000 pcs (in 16 mm tape on 7" reel)
20xxxx-EA00	xxx pcs (in ESD plastic tray)

All specifications subject to change without notice.



Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland

Phone +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com